



**CITY OF WASHINGTON, ILLINOIS**  
**Public Works Committee Agenda Communication**

**Meeting Date:** July 5, 2022

**Prepared By:** Dennis Carr – City Engineer

**Agenda Item:** N. Cummings Mill and Overlay


**Explanation:** Staff had budgeted to mill and overlay N. Cummings from Boyd parkway (Us 24) to the northern City maintenance limits at the entrance of Oak Ridge Park. Staff requested bids from both Tazewell County Asphalt as well as UCM.

Tazewell County Asphalt responded that they would not be submitting a quote, because they do not like to do work this close to highways. Their company is better suited for local roads and parking lots.

UCM's quote was a little higher than expected due largely to the traffic control requirements along the bypass and coordination with IDOT. With the increased cost in oil, staff reduced the planned 2" asphalt thickness by ½" to bring the project in under budget. The 1.5" thickness matches the last IDOT mill and overlay in the turn lanes. The detector loops were placed directly under the last overlay, so there is the chance we avoid getting into the loops with the thinner section.

**Fiscal Impact:** Staff budgeted \$300,000 for this project. UCM's quote is for \$257,094.54 and includes reestablishing the pavement markings that are out there now.

**Recommendation Summary:** Staff recommends the Public Works Committee move the approval of UCM's quote of \$257,094.54 with a not to exceed amount of \$275,000 to City Council for approval. Any potential repairs to the traffic signal detector loops will be done in coordination with IDOT outside of the current project budget.

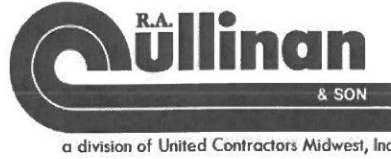

121 West Park St. - P.O. Box 166  
Tremont, Illinois 61568

CONCRETE GRAVEL & BITUMINOUS PAVEMENTS  
CONCRETE AND STEEL BRIDGES AND CULVERTS  
PILE DRIVING - EXCAVATING - DRAINAGE DITCHES

OFFICE PHONE 925-2711  
Area Code 309 PEORIA 676-4343  
Area Code 309 PEKIN 346-7262  
FAX 309-925-7131

Quote To: City of Washington  
301 Walnut Street  
Washington, IL 61571  
  
Attn: Dennis Carr  
Phone: 309-444-1136  
Mobile: 309-271-9635  
Email: dcarr@ci.washington,il.us

Job Name: N. Cummings Mill & Overlay  
Project Location: Washington, IL  
  
Bid Date: June 30, 2022  
FSA: 063022NCUM  
Addendum:


ITEM	DESCRIPTION	QUANTITY	UNIT	UNIT PRICE	AMOUNT
10	HMA Surf Removal, 1.5"	10,895.00	SY	5.00	54,475.00
20	HMA Surf Cse, IL-9.5, Mix D, N50	932.00	TON	211.54	197,155.28
30	Paint Pavement Marking Line - 4"	3,227.00	FT	0.78	2,517.06
40	Paint Pavement Marking Line - 8"	565.00	FT	1.56	881.40
50	Paint Pavement Marking Line - 12"	440.00	FT	2.37	1,042.80
60	Paint Pavement Marking Line - 24"	146.00	FT	4.95	722.70
70	Paint Pavement Marking Line - Letters & Sym.	78.00	SF	3.85	300.30
<b>GRAND TOTAL</b>					<b>257,094.54</b>

**NOTES:**

Pricing for Bit. Tack Coat, Traffic Control is included in HMA pricing.

Thank you for the opportunity to bid on this project. We look forward to working with you.

R. A. Cullinan & Son  
a division of United Contractors Midwest, Inc.

Signed 

Signed \_\_\_\_\_

Date 6/30/22

Date